

Body Cameras

DrivePro™ Body 10

Transcend's DrivePro Body 10 is the best companion for police officers, security guards and other professionals. The camera uses STARVIS™ high-sensitivity image sensor, high-quality lens, and automatic infrared illumination that ensure all the important details of actions are clearly recorded. The DrivePro Body 10 also features a built-in battery and excellent water and shock resistance, making it ideal for indoor and outdoor use.



STARVIS™ high-sensitivity image sensor

Transcend's DrivePro Body 10 features the STARVIS™ high-sensitivity image sensor to capture high-resolution video and photos with superb, rich color. Even in low light, images are highly detailed with low noise and excellent dynamic range.



Infrared LEDs for night vision

Transcend's DrivePro Body 10 has four no-glow (940nm wavelength) infrared LEDs that automatically turn on in dim light to enhance night vision capabilities. This drastically increases recording quality in pitch-black darkness.



Built-in battery

With a built-in Li-Polymer battery, the DrivePro Body 10 can record up to 5 hours of footage on a full charge, mitigating the need for a power adapter for police officers on duty.



Body Cameras

DrivePro™ Body 10

Features

- STARVIS high-sensitivity image sensor
- Infrared LEDs for night vision
- 130° wide FOV
- Quick snapshot button
- A 32GB microSD memory card included

Specification

Appearance

| | |
|-------------------|---|
| Dimensions (Max.) | 88.4 mm x 52.2 mm x 19.6 mm (3.48" x 2.06" x 0.77") |
| Weight (Max.) | 88 g (3.10 oz) |

Interface

| | |
|----------------------|-------------------------|
| USB Type | micro USB to USB Type A |
| Connection Interface | USB 2.0 |

Storage

| | |
|----------|-------|
| Capacity | 32 GB |
|----------|-------|

Hardware

| | |
|---------------|-----------------|
| Viewing angle | 130° (diagonal) |
| Aperture | F/2.8 |

Power

| | |
|------------------------------|--|
| Battery Life (Fully Charged) | 5 hour(s) |
| Power Supply (Max.) | Input: AC 100V-240V, 50-60Hz, 0.4A Output: DC 5V / 2A |

Format

| | |
|--------------|---------------|
| Resolution | Full HD 1080P |
| Frame Rate | 30/60fps |
| Video Format | MP4 (H.264) |

Operating Environment

| | |
|-----------------------|------------------------------|
| Operating Temperature | -20°C (-4°F) ~ 65°C (149°F) |
| Storage Temperature | -25°C (-13°F) ~ 70°C (158°F) |
| IP Rating | IPX4 |

Warranty

| | |
|-------------|--|
| Certificate | CE / FCC / BSMI / KC / MIC / EAC / RCM |
| Warranty | Two-year Limited Warranty |

Ordering Information

| | |
|------|-------------|
| 32GB | TS32GDPB10B |
|------|-------------|



DrivePro Body Toolbox



Transcend's DrivePro Body Toolbox is exclusively designed for the DrivePro Body series, featuring a user-friendly interface that allows users to securely manage recorded videos and snapshots on Windows PCs. In addition, users can adjust settings for both the toolbox and the DrivePro Body device, format the internal storage, and upgrade the body camera's firmware via the toolbox.

Body Cameras Comparison



DrivePro™ Body 60



DrivePro™ Body 30



DrivePro™ Body 52



DrivePro™ Body 20



DrivePro™ Body 10

Appearance

| | | | | | |
|-------------------|--|--|--|--|--|
| Dimensions (Max.) | 95.9 mm x 52.2 mm x 24.9 mm (3.78" x 2.06" x 0.98") | 95.9 mm x 52.2 mm x 27.6 mm (3.78" x 2.06" x 1.09") | 88.4 mm x 52.2 mm x 17.4 mm (3.48" x 2.06" x 0.68") | 88.4 mm x 52.2 mm x 19.4 mm (3.48" x 2.06" x 0.76") | 88.4 mm x 52.2 mm x 19.6 mm (3.48" x 2.06" x 0.77") |
|-------------------|--|--|--|--|--|

| | | | | | |
|--------------------------|--|---|---|---|---|
| Camera Dimensions (Max.) | 61.3 mm x 22 mm x 22 mm (2.41" x 0.87" x 0.87") | - | 40 mm x 40 mm x 20.35 mm (1.57" x 1.57" x 0.80") | - | - |
|--------------------------|--|---|---|---|---|

| | | | | | |
|---------------|-----------------|-----------------|----------------|----------------|----------------|
| Weight (Max.) | 167 g (5.89 oz) | 130 g (4.59 oz) | 84 g (2.96 oz) | 88 g (3.10 oz) | 88 g (3.10 oz) |
|---------------|-----------------|-----------------|----------------|----------------|----------------|

| | | | | | |
|----------------------|---|---|----------------|---|---|
| Camera Weight (Max.) | - | - | 64 g (2.26 oz) | - | - |
|----------------------|---|---|----------------|---|---|

Interface

| | | | | | |
|----------|--------------------------|--------------------------|--------------------------|--------------------------|-------------------------|
| USB Type | 3.5mm plug to USB Type A | 3.5mm plug to USB Type A | 3.5mm plug to USB Type A | 3.5mm plug to USB Type A | micro USB to USB Type A |
|----------|--------------------------|--------------------------|--------------------------|--------------------------|-------------------------|

| | | | | | |
|----------------------|---------|--|--|--|--|
| Connection Interface | USB 2.0 | | | | |
|----------------------|---------|--|--|--|--|

Storage

| | | | | | |
|----------|----------------------|----------------------|----------------------|----------------------|------|
| Capacity | 64GB internal memory | 64GB internal memory | 32GB internal memory | 32GB internal memory | 32GB |
|----------|----------------------|----------------------|----------------------|----------------------|------|

Hardware

| | | | | | |
|---------------|-----------------|-----------------|-----------------|-----------------|-----------------|
| Viewing angle | 130° (diagonal) | 130° (diagonal) | 130° (diagonal) | 160° (diagonal) | 130° (diagonal) |
|---------------|-----------------|-----------------|-----------------|-----------------|-----------------|

| | | | | | |
|----------|-------|-------|-------|-------|-------|
| Aperture | F/2.8 | F/2.0 | F/1.8 | F/2.8 | F/2.8 |
|----------|-------|-------|-------|-------|-------|

| | | | | | |
|--------------|--------|----------|--------|---------|----------|
| Image Sensor | Exmor™ | STARVIS™ | Exmor™ | Aptina™ | STARVIS™ |
|--------------|--------|----------|--------|---------|----------|

| | | | | | |
|---------------|---|---|---|---|---|
| Infrared LEDs | - | ✓ | - | - | ✓ |
|---------------|---|---|---|---|---|

| | | | | | |
|-------|---|---|---|---|---|
| Wi-Fi | ✓ | ✓ | ✓ | ✓ | - |
|-------|---|---|---|---|---|

| | | | | | |
|-----------|---|---|---|---|---|
| Bluetooth | ✓ | ✓ | - | - | - |
|-----------|---|---|---|---|---|

| | | | | | |
|------------|---|---|---|---|---|
| Microphone | ✓ | ✓ | ✓ | ✓ | ✓ |
|------------|---|---|---|---|---|

| | | | | | |
|-----------------|---|---|---|---|---|
| Vibration Alert | ✓ | ✓ | - | - | - |
|-----------------|---|---|---|---|---|

| | | | | | |
|----------------|---|---|---|---|---|
| Buffering Mode | ✓ | ✓ | - | - | - |
|----------------|---|---|---|---|---|

| | | | | | |
|-----------------|---|---|---|---|---|
| Event Recording | - | - | ✓ | ✓ | ✓ |
|-----------------|---|---|---|---|---|

| | | | | | |
|----------------|---|---|---|---|---|
| Loop Recording | ✓ | ✓ | ✓ | ✓ | ✓ |
|----------------|---|---|---|---|---|

Power

| | | | | | |
|----------------------|------------|------------|-------------|-------------|-----------|
| Battery Life (Up to) | 10 hour(s) | 12 hour(s) | 3.5 hour(s) | 3.5 hour(s) | 5 hour(s) |
|----------------------|------------|------------|-------------|-------------|-----------|

| | | | | | |
|---------------------|------------------------------------|--|--------------------|--|--|
| Power Supply (Max.) | Input: AC 100V-240V, 50-60Hz, 0.4A | | Output: DC 5V / 2A | | |
|---------------------|------------------------------------|--|--------------------|--|--|

Format

| | | | | | |
|------------|---------------|--|--|--|--|
| Resolution | Full HD 1080P | | | | |
|------------|---------------|--|--|--|--|

| | | | | | |
|------------|--------|-----------|--------|--------|-----------|
| Frame Rate | 30 fps | 30/60 fps | 30 fps | 30 fps | 30/60 fps |
|------------|--------|-----------|--------|--------|-----------|

| | | | | | |
|--------------|-------------|-------------|-------------|-------------|-------------|
| Video Format | MP4 (H.264) | MP4 (H.264) | MOV (H.264) | MOV (H.264) | MP4 (H.264) |
|--------------|-------------|-------------|-------------|-------------|-------------|


Operating Environment

| | | | | | |
|-----------|------|------|------|------|------|
| IP Rating | IP67 | IP67 | IPX4 | IPX4 | IPX4 |
|-----------|------|------|------|------|------|

Warranty

| | | | | | |
|----------|---------------------------|--|--|--|--|
| Warranty | Two-year Limited Warranty | | | | |
|----------|---------------------------|--|--|--|--|

Note: Exmor/STARVIS is a trademark of Sony Corporation. Aptina is a trademark of Aptina Imaging Corporation.

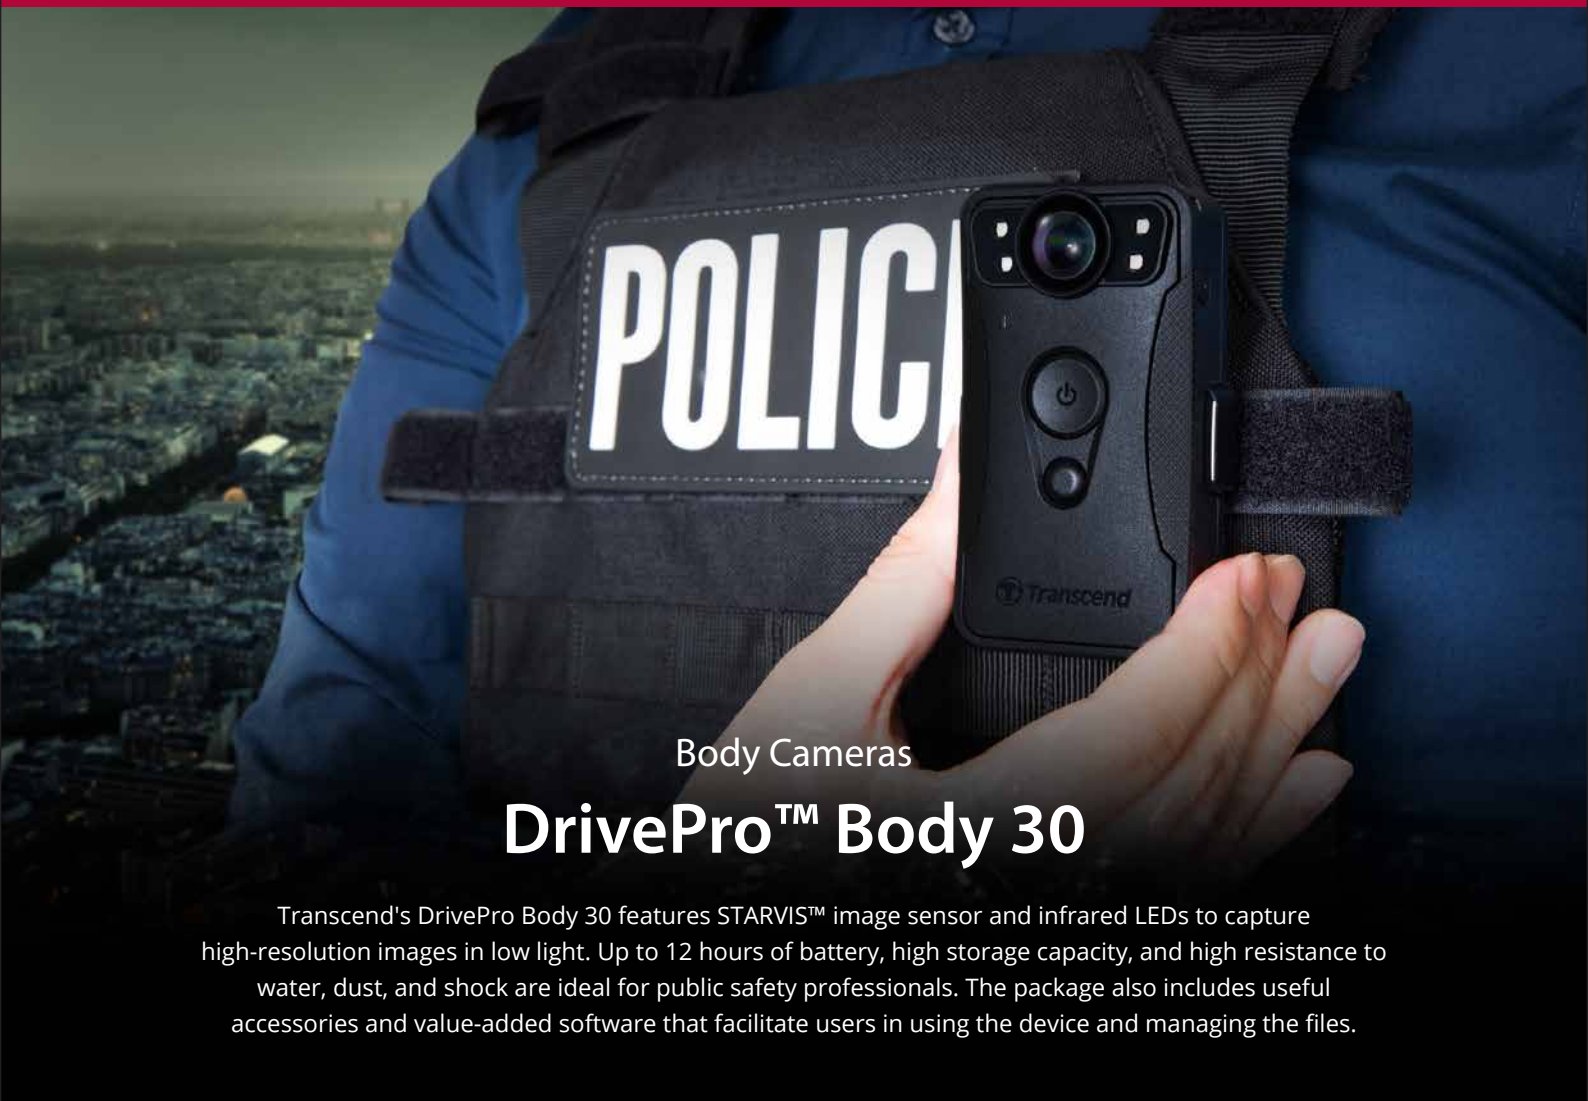

Body Cameras

DrivePro™ Body 30

Transcend's DrivePro Body 30 features STARVIS™ image sensor and infrared LEDs to capture high-resolution images in low light. Up to 12 hours of battery, high storage capacity, and high resistance to water, dust, and shock are ideal for public safety professionals. The package also includes useful accessories and value-added software that facilitate users in using the device and managing the files.



STARVIS™ High-sensitivity Image Sensor

The DrivePro Body 30 features STARVIS™ sensor to capture high-resolution images with superb, rich color even in low light. Images are highly detailed with low noise and excellent balance between light and dark areas.



Infrared LEDs for Night Vision

The DrivePro Body 30 has four infrared LEDs that will automatically turn on in dim light to enhance night vision capabilities. This can drastically increase recording quality in pitch-black darkness.



Image Enhancement Technology

DrivePro Body 30 features image enhancement technologies such as Wide Dynamic Range (WDR) and High Frame Rate (HFR) technologies, supporting high-quality recording at 60fps. Essential details can still be presented even in low, dim light.



Body Cameras

DrivePro™ Body 30

Features

- High sensitivity STARVIS™ image sensor
- Infrared LEDs for night vision
- Built-in battery for up to 12 hours of long recording time
- Compliant with IP67 and U.S. military standards to be dust-proof, waterproof, and shock resistant
- Image enhancement technology
- Exclusive software/app for easy management
- 2-year limited warranty




DrivePro Body Toolbox

Transcend's DrivePro Body Toolbox is exclusively designed for the DrivePro Body series, featuring a user-friendly interface that allows users to securely manage recorded videos and snapshots on Windows PCs. In addition, users can adjust settings for both the toolbox and the DrivePro Body device, format the internal storage, and upgrade the body camera's firmware via the toolbox.

Specification

Appearance

| | |
|------------|---|
| Dimensions | 95.9 mm x 52.2 mm x 27.6 mm (3.78" x 2.06" x 1.09") |
| Weight | 130 g (4.59 oz) |

Interface

| | |
|----------------------|--------------------------|
| USB Type | 3.5mm plug to USB Type A |
| Connection Interface | USB 2.0 |

Storage

| | |
|----------|----------------------|
| Capacity | 64GB internal memory |
|----------|----------------------|

Hardware

| | |
|---------------|-----------------|
| Viewing angle | 130° (diagonal) |
| Aperture | F/2.0 |

Power

| | |
|------------------------------|--|
| Battery Life (Fully Charged) | up to 12 hour(s) |
| Power Supply (Max.) | Input: AC 100V-240V, 50-60Hz, 0.4A Output: DC 5V / 2A |

Format

| | |
|--------------|---------------|
| Resolution | Full HD 1080P |
| Frame Rate | 60/30fps |
| Video Format | MP4 (H.264) |

Operating Environment

| | |
|-----------------------|------------------------------|
| Operating Temperature | -20°C (-4°F) ~ 65°C (149°F) |
| Storage Temperature | -25°C (-13°F) ~ 70°C (158°F) |
| IP Rating | IP67 |

Warranty

| | |
|-------------|--|
| Certificate | CE / FCC / BSMI / KC / NCC / MIC / EAC / RCM |
| Warranty | Two-year Limited Warranty |

Ordering Information

| | |
|------|-------------|
| 64GB | TS64GDPB30A |
|------|-------------|

Body Cameras Comparison



DrivePro™ Body 60



DrivePro™ Body 30



DrivePro™ Body 52



DrivePro™ Body 20



DrivePro™ Body 10

Appearance

| | | | | | |
|-------------------|--|--|--|--|--|
| Dimensions (Max.) | 95.9 mm x 52.2 mm x 24.9 mm (3.78" x 2.06" x 0.98") | 95.9 mm x 52.2 mm x 27.6 mm (3.78" x 2.06" x 1.09") | 88.4 mm x 52.2 mm x 17.4 mm (3.48" x 2.06" x 0.68") | 88.4 mm x 52.2 mm x 19.4 mm (3.48" x 2.06" x 0.76") | 88.4 mm x 52.2 mm x 19.6 mm (3.48" x 2.06" x 0.77") |
|-------------------|--|--|--|--|--|

| | | | | | |
|--------------------------|--|---|---|---|---|
| Camera Dimensions (Max.) | 61.3 mm x 22 mm x 22 mm (2.41" x 0.87" x 0.87") | - | 40 mm x 40 mm x 20.35 mm (1.57" x 1.57" x 0.80") | - | - |
|--------------------------|--|---|---|---|---|

| | | | | | |
|---------------|-----------------|-----------------|----------------|----------------|----------------|
| Weight (Max.) | 167 g (5.89 oz) | 130 g (4.59 oz) | 84 g (2.96 oz) | 88 g (3.10 oz) | 88 g (3.10 oz) |
|---------------|-----------------|-----------------|----------------|----------------|----------------|

| | | | | | |
|----------------------|---|---|----------------|---|---|
| Camera Weight (Max.) | - | - | 64 g (2.26 oz) | - | - |
|----------------------|---|---|----------------|---|---|

Interface

| | | | | | |
|----------|--------------------------|--------------------------|--------------------------|--------------------------|-------------------------|
| USB Type | 3.5mm plug to USB Type A | 3.5mm plug to USB Type A | 3.5mm plug to USB Type A | 3.5mm plug to USB Type A | micro USB to USB Type A |
|----------|--------------------------|--------------------------|--------------------------|--------------------------|-------------------------|

| | | | | | |
|----------------------|---------|--|--|--|--|
| Connection Interface | USB 2.0 | | | | |
|----------------------|---------|--|--|--|--|

Storage

| | | | | | |
|----------|----------------------|----------------------|----------------------|----------------------|------|
| Capacity | 64GB internal memory | 64GB internal memory | 32GB internal memory | 32GB internal memory | 32GB |
|----------|----------------------|----------------------|----------------------|----------------------|------|

Hardware

| | | | | | |
|---------------|-----------------|-----------------|-----------------|-----------------|-----------------|
| Viewing angle | 130° (diagonal) | 130° (diagonal) | 130° (diagonal) | 160° (diagonal) | 130° (diagonal) |
|---------------|-----------------|-----------------|-----------------|-----------------|-----------------|

| | | | | | |
|----------|-------|-------|-------|-------|-------|
| Aperture | F/2.8 | F/2.0 | F/1.8 | F/2.8 | F/2.8 |
|----------|-------|-------|-------|-------|-------|

| | | | | | |
|--------------|--------|----------|--------|---------|----------|
| Image Sensor | Exmor™ | STARVIS™ | Exmor™ | Aptina™ | STARVIS™ |
|--------------|--------|----------|--------|---------|----------|

| | | | | | |
|---------------|---|---|---|---|---|
| Infrared LEDs | - | ✓ | - | - | ✓ |
|---------------|---|---|---|---|---|

| | | | | | |
|-------|---|---|---|---|---|
| Wi-Fi | ✓ | ✓ | ✓ | ✓ | - |
|-------|---|---|---|---|---|

| | | | | | |
|-----------|---|---|---|---|---|
| Bluetooth | ✓ | ✓ | - | - | - |
|-----------|---|---|---|---|---|

| | | | | | |
|------------|---|---|---|---|---|
| Microphone | ✓ | ✓ | ✓ | ✓ | ✓ |
|------------|---|---|---|---|---|

| | | | | | |
|-----------------|---|---|---|---|---|
| Vibration Alert | ✓ | ✓ | - | - | - |
|-----------------|---|---|---|---|---|

| | | | | | |
|----------------|---|---|---|---|---|
| Buffering Mode | ✓ | ✓ | - | - | - |
|----------------|---|---|---|---|---|

| | | | | | |
|-----------------|---|---|---|---|---|
| Event Recording | - | - | ✓ | ✓ | ✓ |
|-----------------|---|---|---|---|---|

| | | | | | |
|----------------|---|---|---|---|---|
| Loop Recording | ✓ | ✓ | ✓ | ✓ | ✓ |
|----------------|---|---|---|---|---|

Power

| | | | | | |
|----------------------|------------|------------|-------------|-------------|-----------|
| Battery Life (Up to) | 10 hour(s) | 12 hour(s) | 3.5 hour(s) | 3.5 hour(s) | 5 hour(s) |
|----------------------|------------|------------|-------------|-------------|-----------|

| | | | | | |
|---------------------|------------------------------------|--|--------------------|--|--|
| Power Supply (Max.) | Input: AC 100V-240V, 50-60Hz, 0.4A | | Output: DC 5V / 2A | | |
|---------------------|------------------------------------|--|--------------------|--|--|

Format

| | | | | | |
|------------|---------------|--|--|--|--|
| Resolution | Full HD 1080P | | | | |
|------------|---------------|--|--|--|--|

| | | | | | |
|------------|--------|-----------|--------|--------|-----------|
| Frame Rate | 30 fps | 30/60 fps | 30 fps | 30 fps | 30/60 fps |
|------------|--------|-----------|--------|--------|-----------|

| | | | | | |
|--------------|-------------|-------------|-------------|-------------|-------------|
| Video Format | MP4 (H.264) | MP4 (H.264) | MOV (H.264) | MOV (H.264) | MP4 (H.264) |
|--------------|-------------|-------------|-------------|-------------|-------------|

Operating Environment

| | | | | | |
|-----------|------|------|------|------|------|
| IP Rating | IP67 | IP67 | IPX4 | IPX4 | IPX4 |
|-----------|------|------|------|------|------|

Warranty

| | | | | | |
|----------|---------------------------|--|--|--|--|
| Warranty | Two-year Limited Warranty | | | | |
|----------|---------------------------|--|--|--|--|

Note: Exmor/STARVIS is a trademark of Sony Corporation. Aptina is a trademark of Aptina Imaging Corporation.



Body Cameras DrivePro™ Body 60

Transcend's DrivePro Body 60 body camera features a compact camera unit tethered to a control unit, allowing for a wide variety of attachment options. Tailor-made for public safety professionals, the rugged and highly responsive DrivePro Body 60 allows high-definition evidence collection and wireless data previews and transfers.



Outdoor

Indoor

Exmor™ high-sensitivity image sensor

The DrivePro Body 60 features the Exmor™ sensor to capture high-resolution images with superb, rich color even in low light. Images are highly detailed with low noise and excellent balance between light and dark areas.



Tethered camera unit

The DrivePro Body 60 is composed of a control unit tethered to a compact camera unit that can be securely mounted on shoulder harnesses or helmets, making it a solid choice for filming in the dynamic environments public safety officers work in every day.



Bluetooth and Wi-Fi connectivity

Designed to work with Transcend's DrivePro Body App, the DrivePro Body 60 supports both Bluetooth for basic setup and switching modes, and Wi-Fi connectivity for live streaming of videos on iOS and Android mobile devices.



Body Cameras

DrivePro™ Body 60

Features

- High sensitivity Exmor™ image sensor
- Supports Bluetooth and Wi-Fi connection
- Built-in GPS/GLONASS receiver
- Built-in 10-hour battery for long recording time
- Compliant with IP67 and U.S. military standards to be dust-proof, waterproof, and shock resistant

Specification

Appearance

| | |
|--------------------------|---|
| Dimensions (Max.) | 95.9 mm x 52.2 mm x 24.9 mm (3.78" x 2.06" x 0.98") |
| Camera Dimensions (Max.) | 61.3 mm x 22 mm x 22 mm (2.41" x 0.87" x 0.87") |
| Weight (Max.) | 167 g (5.89 oz) |

Interface

| | |
|----------------------|--------------------------|
| USB Type | 3.5mm plug to USB Type A |
| Connection Interface | USB 2.0 |

Storage

| | |
|----------|----------------------|
| Capacity | 64GB internal memory |
|----------|----------------------|

Hardware

| | |
|---------------|-----------------|
| Viewing angle | 130° (diagonal) |
| Aperture | F/2.8 |

Power

| | |
|------------------------------|--|
| Battery Life (Fully Charged) | 10 hour(s) |
| Power Supply (Max.) | Input: AC 100V-240V, 50-60Hz, 0.4A Output: DC 5V / 2A |

Format

| | |
|--------------|---------------|
| Resolution | Full HD 1080P |
| Frame Rate | 30 fps |
| Video Format | MP4 (H.264) |

Operating Environment

| | |
|-----------------------|------------------------------|
| Operating Temperature | -20°C (-4°F) ~ 65°C (149°F) |
| Storage Temperature | -25°C (-13°F) ~ 70°C (158°F) |
| IP Rating | IP67 |

Warranty

| | |
|-------------|--|
| Certificate | CE / FCC / BSMI / KC / NCC / MIC / EAC / RCM |
| Warranty | Two-year Limited Warranty |

Ordering Information

| | |
|------|-------------|
| 64GB | TS64GDPB60A |
|------|-------------|




DrivePro Body Toolbox

Transcend's DrivePro Body Toolbox is exclusively designed for the DrivePro Body series, featuring a user-friendly interface that allows users to securely manage recorded videos and snapshots on Windows PCs. In addition, users can adjust settings for both the toolbox and the DrivePro Body device, format the internal storage, and upgrade the body camera's firmware via the toolbox.

Body Cameras Comparison



DrivePro™ Body 60



DrivePro™ Body 30



DrivePro™ Body 52



DrivePro™ Body 20



DrivePro™ Body 10

Appearance

| | | | | | |
|-------------------|--|--|--|--|--|
| Dimensions (Max.) | 95.9 mm x 52.2 mm x 24.9 mm (3.78" x 2.06" x 0.98") | 95.9 mm x 52.2 mm x 27.6 mm (3.78" x 2.06" x 1.09") | 88.4 mm x 52.2 mm x 17.4 mm (3.48" x 2.06" x 0.68") | 88.4 mm x 52.2 mm x 19.4 mm (3.48" x 2.06" x 0.76") | 88.4 mm x 52.2 mm x 19.6 mm (3.48" x 2.06" x 0.77") |
|-------------------|--|--|--|--|--|

| | | | | | |
|--------------------------|--|---|---|---|---|
| Camera Dimensions (Max.) | 61.3 mm x 22 mm x 22 mm (2.41" x 0.87" x 0.87") | - | 40 mm x 40 mm x 20.35 mm (1.57" x 1.57" x 0.80") | - | - |
|--------------------------|--|---|---|---|---|

| | | | | | |
|---------------|-----------------|-----------------|----------------|----------------|----------------|
| Weight (Max.) | 167 g (5.89 oz) | 130 g (4.59 oz) | 84 g (2.96 oz) | 88 g (3.10 oz) | 88 g (3.10 oz) |
|---------------|-----------------|-----------------|----------------|----------------|----------------|

| | | | | | |
|----------------------|---|---|----------------|---|---|
| Camera Weight (Max.) | - | - | 64 g (2.26 oz) | - | - |
|----------------------|---|---|----------------|---|---|

Interface

| | | | | | |
|----------|--------------------------|--------------------------|--------------------------|--------------------------|-------------------------|
| USB Type | 3.5mm plug to USB Type A | 3.5mm plug to USB Type A | 3.5mm plug to USB Type A | 3.5mm plug to USB Type A | micro USB to USB Type A |
|----------|--------------------------|--------------------------|--------------------------|--------------------------|-------------------------|

| | | | | | |
|----------------------|---------|--|--|--|--|
| Connection Interface | USB 2.0 | | | | |
|----------------------|---------|--|--|--|--|

Storage

| | | | | | |
|----------|----------------------|----------------------|----------------------|----------------------|------|
| Capacity | 64GB internal memory | 64GB internal memory | 32GB internal memory | 32GB internal memory | 32GB |
|----------|----------------------|----------------------|----------------------|----------------------|------|

Hardware

| | | | | | |
|---------------|-----------------|-----------------|-----------------|-----------------|-----------------|
| Viewing angle | 130° (diagonal) | 130° (diagonal) | 130° (diagonal) | 160° (diagonal) | 130° (diagonal) |
|---------------|-----------------|-----------------|-----------------|-----------------|-----------------|

| | | | | | |
|----------|-------|-------|-------|-------|-------|
| Aperture | F/2.8 | F/2.0 | F/1.8 | F/2.8 | F/2.8 |
|----------|-------|-------|-------|-------|-------|

| | | | | | |
|--------------|--------|----------|--------|---------|----------|
| Image Sensor | Exmor™ | STARVIS™ | Exmor™ | Aptina™ | STARVIS™ |
|--------------|--------|----------|--------|---------|----------|

| | | | | | |
|---------------|---|---|---|---|---|
| Infrared LEDs | - | ✓ | - | - | ✓ |
|---------------|---|---|---|---|---|

| | | | | | |
|-------|---|---|---|---|---|
| Wi-Fi | ✓ | ✓ | ✓ | ✓ | - |
|-------|---|---|---|---|---|

| | | | | | |
|-----------|---|---|---|---|---|
| Bluetooth | ✓ | ✓ | - | - | - |
|-----------|---|---|---|---|---|

| | | | | | |
|------------|---|---|---|---|---|
| Microphone | ✓ | ✓ | ✓ | ✓ | ✓ |
|------------|---|---|---|---|---|

| | | | | | |
|-----------------|---|---|---|---|---|
| Vibration Alert | ✓ | ✓ | - | - | - |
|-----------------|---|---|---|---|---|

| | | | | | |
|----------------|---|---|---|---|---|
| Buffering Mode | ✓ | ✓ | - | - | - |
|----------------|---|---|---|---|---|

| | | | | | |
|-----------------|---|---|---|---|---|
| Event Recording | - | - | ✓ | ✓ | ✓ |
|-----------------|---|---|---|---|---|

| | | | | | |
|----------------|---|---|---|---|---|
| Loop Recording | ✓ | ✓ | ✓ | ✓ | ✓ |
|----------------|---|---|---|---|---|

Power

| | | | | | |
|----------------------|------------|------------|-------------|-------------|-----------|
| Battery Life (Up to) | 10 hour(s) | 12 hour(s) | 3.5 hour(s) | 3.5 hour(s) | 5 hour(s) |
|----------------------|------------|------------|-------------|-------------|-----------|

| | | | | | |
|---------------------|------------------------------------|--|--------------------|--|--|
| Power Supply (Max.) | Input: AC 100V-240V, 50-60Hz, 0.4A | | Output: DC 5V / 2A | | |
|---------------------|------------------------------------|--|--------------------|--|--|

Format

| | | | | | |
|------------|---------------|--|--|--|--|
| Resolution | Full HD 1080P | | | | |
|------------|---------------|--|--|--|--|

| | | | | | |
|------------|--------|-----------|--------|--------|-----------|
| Frame Rate | 30 fps | 30/60 fps | 30 fps | 30 fps | 30/60 fps |
|------------|--------|-----------|--------|--------|-----------|

| | | | | | |
|--------------|-------------|-------------|-------------|-------------|-------------|
| Video Format | MP4 (H.264) | MP4 (H.264) | MOV (H.264) | MOV (H.264) | MP4 (H.264) |
|--------------|-------------|-------------|-------------|-------------|-------------|

Operating Environment

| | | | | | |
|-----------|------|------|------|------|------|
| IP Rating | IP67 | IP67 | IPX4 | IPX4 | IPX4 |
|-----------|------|------|------|------|------|

Warranty

| | | | | | |
|----------|---------------------------|--|--|--|--|
| Warranty | Two-year Limited Warranty | | | | |
|----------|---------------------------|--|--|--|--|

Note: Exmor/STARVIS is a trademark of Sony Corporation. Aptina is a trademark of Aptina Imaging Corporation.



Docking Station TS-DPD6N

Designed exclusively for Transcend's DrivePro Body 30 and DrivePro Body 60 body cameras, Transcend's TS-DPD6N docking station offers a complete camera charging and data upload solution. The six-port docking station is network-based, providing two Ethernet ports for scalability and fast deployment. A LAN port is used for administrative setup, whereas a WAN port is for data upload to a designated folder while charging. A USB 3.1 Gen 1 port is also included for storing video recordings and snapshots to external storage devices.




Made for Transcend's DrivePro Body cameras

Designed exclusively for the DrivePro Body 30 and DrivePro Body 60, Transcend's TS-DPD6N docking station offers a complete camera charging and data upload solution.



Multifunctional docking station

The networked docking station features both a LAN port for administrative setup and a WAN port for simultaneous upload of data to a designated folder. A USB port is also included for exporting videos and snapshots to external storage devices.

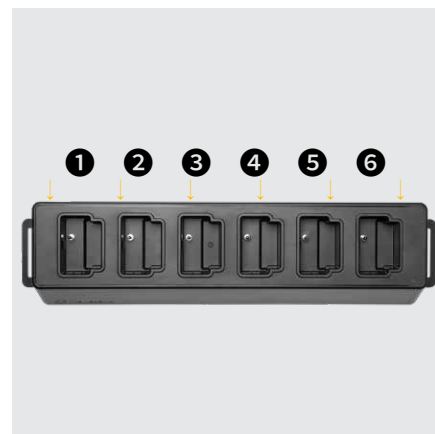

Charge and upload at once

The station's six charging ports make for supreme efficiency. They can all be used simultaneously, and users can charge devices even while uploading data.



Docking Station TS-DPD6N

Features

- For Transcend's DrivePro Body 30 & 60 cameras
- A complete camera charging and data upload solution
- Six charging ports for supreme efficiency
- Upload data simultaneously
- Auto backup and unlock

Specifications

Appearance

| | |
|------------|--|
| Dimensions | 423 mm x 105 mm x 54 mm (16.65" x 4.13" x 2.13") |
|------------|--|

| | |
|--------|------------------|
| Weight | 980 g (34.57 oz) |
|--------|------------------|

Interface

| | |
|----------|------------|
| USB Type | USB Type-A |
|----------|------------|

| | |
|----------------------|---------------|
| Connection Interface | USB 3.1 Gen 1 |
|----------------------|---------------|

Hardware

| | |
|--------------|--------------------------------|
| Network Port | WAN: 10/100/1000 Mbps Ethernet |
|--------------|--------------------------------|

| | |
|--|---------------------------|
| | LAN: 10/100 Mbps Ethernet |
|--|---------------------------|

Power

| | |
|---------------------|----------|
| Power Supply (Max.) | 12V / 3A |
|---------------------|----------|

Operating Environment

| | |
|-----------------------|---------------------------|
| Operating Temperature | 0°C (32°F) ~ 40°C (104°F) |
|-----------------------|---------------------------|

| | |
|---------------------|-----------------------------|
| Storage Temperature | -20°C (-4°F) ~ 70°C (158°F) |
|---------------------|-----------------------------|

Warranty

| | |
|-------------|----------------------------------|
| Certificate | CE / FCC / BSMI / KC / EAC / RCM |
|-------------|----------------------------------|

| | |
|----------|---------------------------|
| Warranty | Two-year Limited Warranty |
|----------|---------------------------|

Ordering Information

| | |
|----------|---|
| TS-DPD6N | For DrivePro Body 30 and DrivePro Body 60 |
|----------|---|



Body Camera Accessories

DrivePro™ Body Control Center

Transcend's DrivePro Body Control Center is a digital evidence management system designed specifically to work with the TS-DPD6N networked docking station. With up to 16TB storage capacity, this secure, centralized server can store more than 4,000 hours of 1080P video recordings.



File management

In addition to video browsing and playback, Control Center can categorize and search uploaded files so users can quickly locate the video clip they are looking for. Control Center also allows users to determine how long to archive a file. Files past their retention period can be deleted automatically, freeing up storage space.



Account management

Control Center features advanced permissions management, enabling fine-tuned access control to prevent unauthorized tampering or deleting of evidence. All actions, such as logins, video access, or file editing, are recorded in the system log.



Device management

Control Center supports simultaneous connection of up to 3 docking stations or 18 devices in total. Users can adjust devices' default settings, manage device passwords, and maintain updated firmware across all devices.



Body Camera Accessories

DrivePro™ Body Control Center

Features

- A digital evidence management system
- Up to 16TB storage capacity
- Supports network-based docking station
- NAS-grade HDDs inside
- Categorize files for users to quickly locate the video clip they are looking for
- Files past their retention period can be deleted automatically
- Advanced permissions management enabling fine-tuned access control
- Simultaneous connection of up to 3 docking stations or 18 devices in total

Note:

Transcend's TS-DPD6N docking station only supports the DrivePro Body 30 and DrivePro Body 60 cameras.

Specifications

Appearance

| | |
|-------------------|---|
| Dimensions (Max.) | 210.8 mm x 129.4 mm x 87.8 mm (8.30" x 5.09" x 3.46") |
| Weight (Max.) | 2,300 g (81.13 oz) |

Hardware

| | |
|----------|--------------------------------|
| LAN Port | 1 Gigabit Ethernet port |
| CPU Type | ARM Cortex-A7 Dual-Core 1.1GHz |
| RAM | DDR3 512MB |

Storage

| | |
|---------------|--------------------|
| Capacity | 16 TB |
| Storage Media | NAS-grade 3.5" HDD |

Operating Environment

| | |
|-----------------------|--------------------------|
| Operating Temperature | 5°C (41°F) ~ 35°C (95°F) |
|-----------------------|--------------------------|

Power

| | |
|---------------------|----------------------|
| Power Supply (Max.) | AC 100-240V, 50/60Hz |
|---------------------|----------------------|

Warranty

| | |
|-------------|----------------------------------|
| Certificate | CE / FCC / BSMI / KC / EAC / RCM |
| Warranty | Two-year Limited Warranty |

Ordering Information

| | |
|------|-------------|
| 0TB | TS-DBN1 |
| 16TB | TS-DBN1-16T |